




Urban Application

Recommended Vehicle Type & Position



AEOLUS

NEO AGB23 All-position

Suitable for all axles, urban and regional application use. Longer mileage with deeper tread depth and excellent sidewall protection which minimizes damage against obstacles.


Longer Mileage

Durability

Low Rolling Resistance

Fatigue Resistance

New Appearance

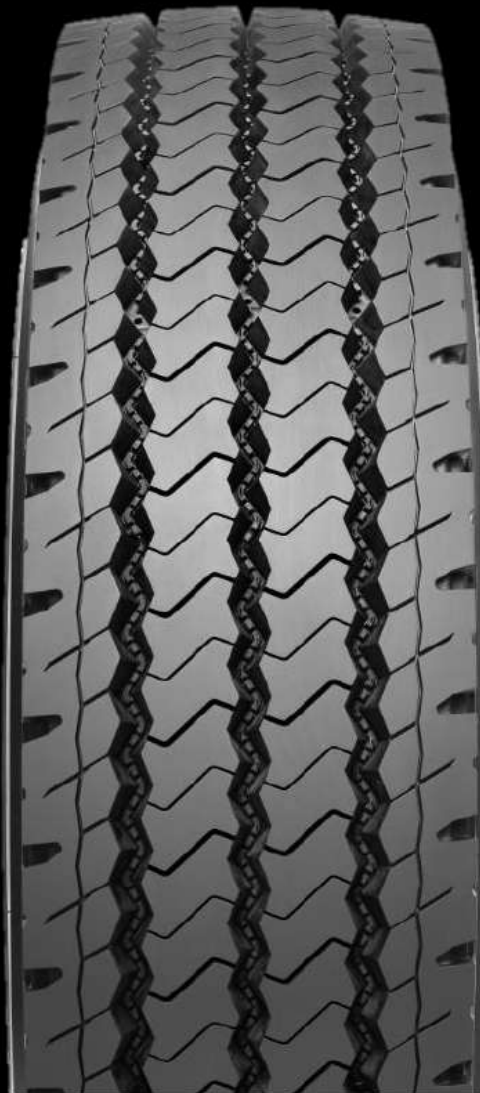

Size	PLY Rating	Overall Diameter (mm)	Overall Width (mm)	Max Load Single(kg)	Max Load Dual(kg)	Max Pressure Single(kPa)	Max Pressure Dual(kPa)	LI/SS	Second LI/SS	Tread Depth (mm)	DOT	M+S
11R22.5	18	1061	280	3150	2900	850	850	148/145J	151/148E	20	✓	✓
215/75R17.5	16	769	220	1750	1600	830	830	127/124M	---	15	✓	✓
215/75R17.5	16	769	220	1750	1600	830	830	127/124M	---	15	✓	✓
225/70R19.5	16	810	230	1900	1800	830	830	130/128L	---	15	✓	✓
245/70R19.5	18	854	250	2800	2650	900	900	144/142J	---	16	✓	✓
255/70R22.5	16	932	252	2500	2300	830	830	140/137J	---	16.5	✓	✓
265/70R19.5	18	872	259	2725	2575	830	830	143/141J	---	16	✓	✓
275/70R22.5	18	971	286	3350	3150	900	900	150/148J	152/148E	20.5	✓	✓
295/80R22.5	18	1063	310	3550	3250	900	900	152/149J	154/150E	18.5	✓	✓